


## Sleeve-Flex Elastomeric Couplings

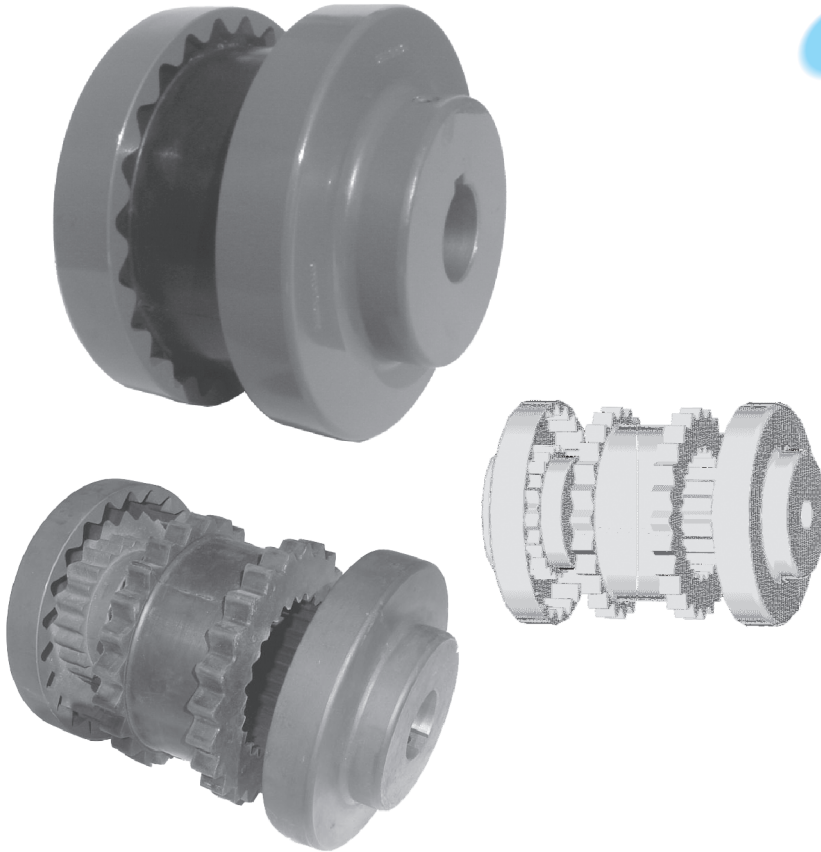

### Design Features

Need No Lubrication

No Maintenance


Quick & Easy Installation

Clean & quiet Performance


**Sleeve-Flex** can be installed quickly and easily, because there are no bolts, gaskets, covers or seals. Alignment can be checked with a straight edge placed across the outside of the precision machined flanges. No special tools are needed for installation, alignment or removal.

The teeth of sleeve lock into the teeth of the flanges without clamps or screws, tightening under torque to provide smooth transmission of power. There is no rubbing action of metal against rubber to cause wear. Couplings are not affected by abrasives, dirt or moisture.


This eliminates the need for lubrication or maintenance, provides clean, dependable, quiet performance.

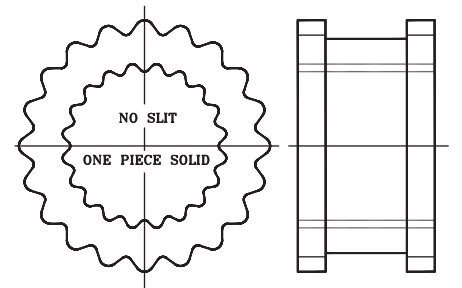


JE SLEEVES (FOR SIZE 3 TO 10)

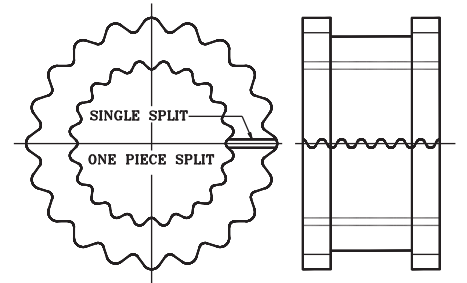


JES SLEEVES (FOR SIZE 3 TO 10).

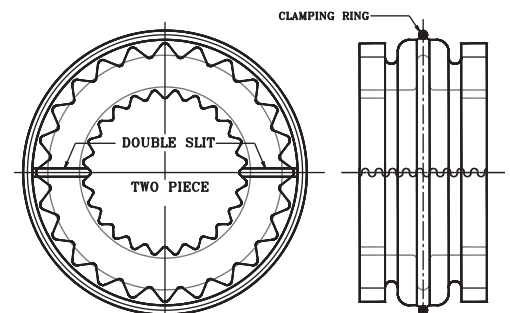

E SLEEVES (FOR SIZE 11 TO 13).

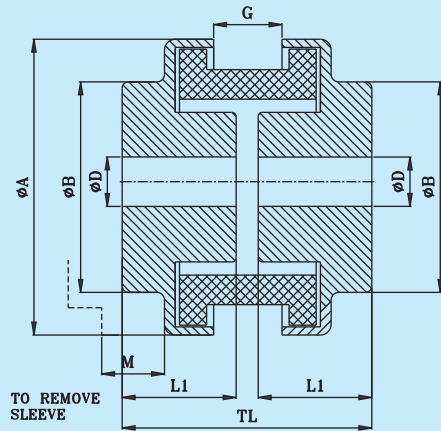

FLANGE  
TYPE- 'S'

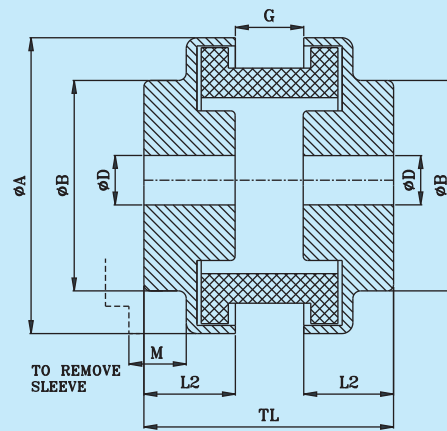

FLANGE  
TYPE- 'J'

## TECHNICAL DATA

Coupling Size	Flange Type	Sleeve Type	kW @ 100 rpm	Rated Torque	Max. Speed	Bore (mm) ØD		Dimensions (mm)						Weight Kg	
				Nm	rpm	P.B.	MAX.	ØA	ØB	G	L1	L2	M		TL
3	J	JE, JES	0.08	7.64	9200	10	22	52	38	9	-	20	16	49	0.3
4	J		0.15	14.32	7600	13	25	63	41	16	-	22	16	60	0.5
5	J		0.30	28.65	7600	13	29	83	48	18	-	26	23	70	1.1
	S									19	34	-	30	71	
6	J		0.52	49.66	6000	16	35	102	63	21	-	33	28	87	2
	S									21	41	-	36	87	
7	S		0.90	85.94	5250	16	48	118	71	25	47	-	34	100	2.8
8	S		1.34	127.96	4500	19	54	138	98	28	53	-	38	112	4.8
9	S		2.16	206.26	3750	22	64	161	98	36	61	-	45	128	7.2
10	S		3.43	327.54	3600	29	73	191	111	41	69	-	51	144	11.2
11	S	E	5.37	512.80	3600	32	87	219	133	48	87	-	61	181	18
12	S		8.50	811.69	2800	38	98	254	146	60	102	-	68	211	28
13	S		13.43	1282.47	2400	51	100	299	171	68	111	-	78	236	48

- Flange Size 3 & 4 Are Available In Aluminium While 5 To 13 Are In Cast Iron.
- The Weight Is Approximate With Solid Flange.

• All dimensions are in mm unless otherwise specified.

• In view of our constant endeavour to improve the quality of our products, we reserve the right to alter or change specifications without prior notice.  
• This document is an intellectual property of Rathi Transpower Pvt. Ltd. and subject to copyright.



### Rathi Transpower Pvt Ltd

Gaia Apex, S. No. 33/2D, Viman Nagar  
Pune 411 014, (INDIA)  
Phone : 91-20-30517201  
Fax : 91-20-30517212  
E-mail : enquiry@rathigroup.com  
Website : www.rathicouplings.com

### Distributor